


RIGID COUPLINGS

Specifications

- Torque range
25 – 2250 Nm
- Does not damage
the shaft
- To connect shafts
without misalignment
- Available in blackened
steel C45 and stainless
steel 1.4301

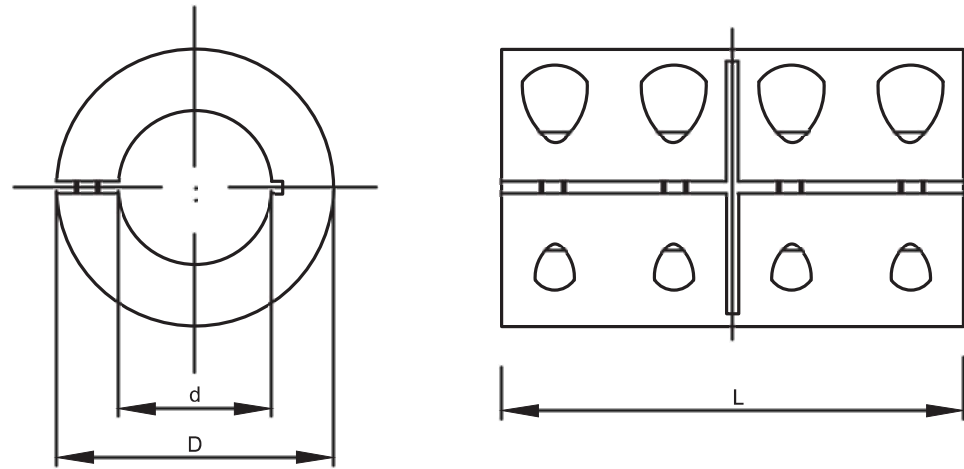


one-piece clamp style

Size	Rated torque T_{Kmax} (Nm)		Dimensions (mm)			Clamping screw DIN 912			Weight	
	Steel	Stainless steel	d	D	L	M	Steel T_A (Nm)	Stainless steel T_A (Nm)	Steel M (g)	Stainless Steel M (g)
6	30	25	6	18	30	M3 x 8	2,1	1,1	35	47
8	50	40	8	24	35	M3 x 10	2,1	1,1	102	102
10	100	90	10	29	45	M4 x 12	4,6	2,5	185	185
12	100	90	12	29	45	M4 x 12	4,6	2,5	180	180
14	190	160	14	34	50	M5 x 16	9,5	5,4	272	272
15	190	160	15	34	50	M5 x 16	9,5	5,4	266	266
16	190	160	16	34	50	M5 x 16	9,5	5,4	261	261
20	350	300	20	42	65	M6 x 16	16	9,6	520	518
25	390	325	25	45	75	M6 x 16	16	9,6	518	623
30	475	400	30	53	83	M6 x 18	16	9,6	623	920
35	1.100	925	35	67	95	M8 x 25	39	23	920	1.880
40	1.325	1.100	40	77	108	M8 x 25	39	23	1.880	2.710
50	2.250	1.875	50	85	124	M10 x 25	77	46	2.710	3.520

Specifications

- Torque range
25 - 2250 Nm
- Two-pieced for easier installation
- Does not damage the shaft
- To connect shafts without misalignment
- Available in blackened steel C45 and stainless steel 1.4301

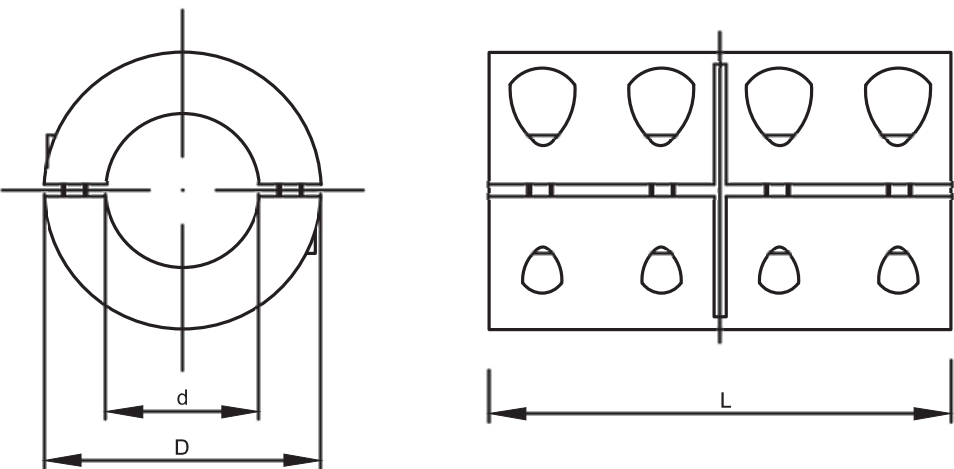

two-pieced clamp style

Size	Rated torque T_{Kmax} (Nm)		Dimensions (mm)			Clamping screw DIN 912			Weight	
	Steel	Stainless steel	d	D	L	M	Steel T_A (Nm)	Stainless steel T_A (Nm)	Steel M (g)	Stainless Steel M (g)
6	30	25	6	18	30	M3 x 8	2,1	1,1	35	47
8	50	40	8	24	35	M3 x 10	2,1	1,1	102	102
10	100	90	10	29	45	M4 x 12	4,6	2,5	185	185
12	100	90	12	29	45	M4 x 12	4,6	2,5	180	180
14	190	160	14	34	50	M5 x 16	9,5	5,4	272	272
15	190	160	15	34	50	M5 x 16	9,5	5,4	266	266
16	190	160	16	35	50	M5 x 16	9,5	5,4	261	261
20	350	300	20	42	65	M6 x 16	16	9,6	520	518
25	390	325	25	45	75	M6 x 16	16	9,6	518	623
30	475	400	30	53	83	M6 x 18	16	9,6	623	920
35	1.100	925	35	67	95	M8 x 25	39	23	920	1.880
40	1.325	1.100	40	77	108	M8 x 25	39	23	1.880	2.710
50	2.250	1.875	50	85	124	M10 x 25	77	46	2.710	3.520