

BALGKUPPLUNG BELLOWS COUPLING BKXX 1622/1624/1627



Klemmnaben


Clamping hubs

Technische Daten / technical data		BKXX 1622	BKXX 1624	BKXX 1627
max. Drehzahl / max. speed	min ⁻¹	10.000	10.000	10.000
max. Drehmoment / max. torque	Nm	0,4	0,4	0,4
max. Wellenversatz / max. offset off shafts				
radial / radial	mm	± 0,2	± 0,25	± 0,3
axial / axial	mm	± 0,4	± 0,45	± 0,5
angular / angular	Grad	± 3	± 4	± 4
Drehfedersteife / torsion spring stiffness	Nm/rad	90	85	70
Radialfedersteife / radial spring stiffness	N/mm	22	20	15
Trägheitsmoment / moment of inertia	gcm ²	2,1	2,2	2,6
max. M der Schrauben / max. clamping torque	Ncm	50	50	50
Temperaturbereich / temperature range	°C	-40 / +140	-40 / +140	-40 / +140
Gewicht ca. / weight appr.	g	6	6,5	7
Werkstoff / material	Flansch / flange	Aluminium, eloxiert / aluminium, anodised		
Werkstoff / material	Balg / bellows	Edelstahl / stainless steel		

M = Anzugsmoment der Klemmschraube / tightening torque of the clamping screw
Ø 63 ≅ Ø 6,35 mm ≅ Ø 1/4"




BKXX 1622

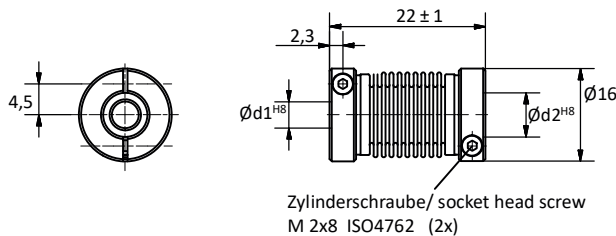


Bohrungskombinationen / bore combinations BKXX 1622						
d1 / d2	2	3	4	5	6	63
2	X	X	X	X	X	X
3		X	X	X	X	X
4			X	X	X	X
5				X	X	X
6					X	X
63						X
Bestellbeispiel / Example BKXX 1622 05/06						

BKXX 1624

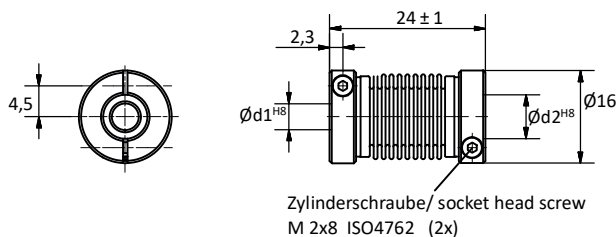

Bohrungskombinationen / bore combinations BKXX 1624						
d1 / d2	2	3	4	5	6	63
2	X	X	X	X	X	X
3		X	X	X	X	X
4			X	X	X	X
5				X	X	X
6					X	X
63						X
Bestellbeispiel / Example BKXX 1624 05/06						

BKXX 1627

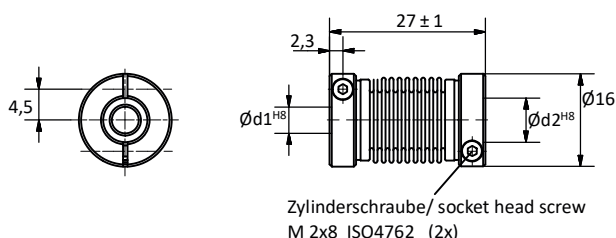

Bohrungskombinationen / bore combinations BKXX 1627						
d1 / d2	2	3	4	5	6	63
2	X	X	X	X	X	X
3		X	X	X	X	X
4			X	X	X	X
5				X	X	X
6					X	X
63						X
Bestellbeispiel / Example BKXX 1627 05/06						

Email: info@ach.nu