

BALGKUPPLUNG BELLOWS COUPLING BKXX 2429/2435



Klemmnaben


Clamping hubs

Technische Daten / technical data		BKXX 2429	BKXX 2435
max. Drehzahl / max. speed	min ⁻¹	10.000	10.000
max. Drehmoment / max. torque	Nm	1,2	1
max. Wellenversatz / max. offset off shafts			
radial / radial	mm	± 0,25	± 0,3
axial / axial	mm	± 0,4	± 0,5
angular / angular	Grad	± 4	± 4
Drehfedersteife / torsion spring stiffness	Nm/rad	150	140
Radialfedersteife / radial spring stiffness	N/mm	25	10
Trägheitsmoment / moment of inertia	gcm ²	15	15,2
max. M der Schrauben / max. clamping torque	Ncm	100	100
Temperaturbereich / temperature range	°C	-40 / +140	-40 / +140
Gewicht ca. / weight appr.	g	17	18
Werkstoff / material	Flansch / flange	Aluminium, eloxiert / aluminium, anodised	
Werkstoff / material	Balg / bellows	Edelstahl / stainless steel	

M = Anzugsmoment der Klemmschraube / tightening torque of the clamping screw




BKXX 2429

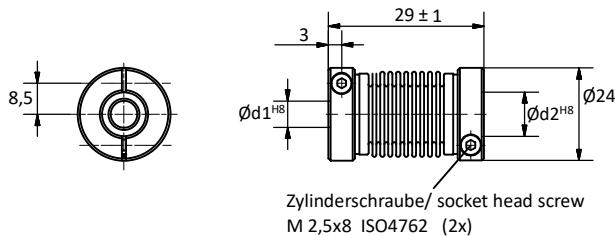

Bohrungskombinationen / bore combinations BKXX 2429				
d1 / d2	6	8	10	12
6	X	X	X	X
8		X	X	X
10			X	X
12				X
Bestellbeispiel / Example BKXX 2429 08/10				

BKXX 2435

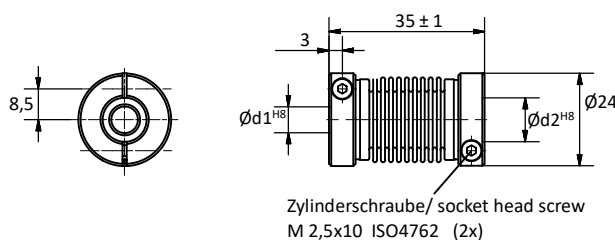

Bohrungskombinationen / bore combinations BKXX 2435				
d1 / d2	6	8	10	12
6	X	X	X	X
8		X	X	X
10			X	X
12				X
Bestellbeispiel / Example BKXX 2435 08/10				