

BALGKUPPLUNG BELLOWS COUPLING BKXS 2526/2531



Schraubnaben


Screw hubs

Technische Daten / technical data		BKXS 2526	BKXS 2531
max. Drehzahl / max. speed	min ⁻¹	10.000	10.000
max. Drehmoment / max. torque	Nm	2	2
max. Wellenversatz / max. offset off shafts			
radial / radial	mm	± 0,3	± 0,35
axial / axial	mm	± 0,4	± 0,45
angular / angular	Grad	± 4	± 4
Drehfedersteife / torsion spring stiffness	Nm/rad	220	183
Radialfedersteife / radial spring stiffness	N/mm	45	17,8
Trägheitsmoment / moment of inertia	gcm ²	19	20
max. M der Schrauben / max. clamping torque	Ncm	150	150
Temperaturbereich / temperature range	°C	-40 / +140	-40 / +140
Gewicht ca. / weight appr.	g	17,5	18
Werkstoff / material	Flansch / flange	Aluminium, eloxiert / aluminium, anodised	
Werkstoff / material	Balg / bellows	Edelstahl / stainless steel	




M = Anzugsmoment der Gewindestifte/ tightening torque of the set screws

BKXS 2526

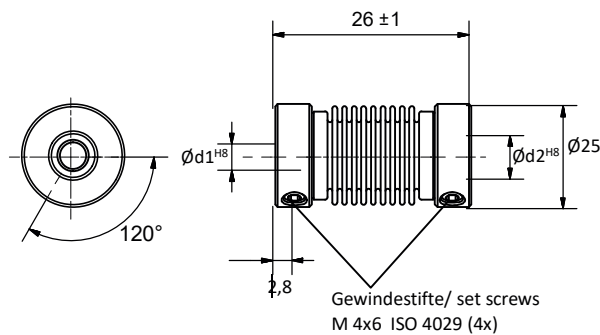

Bohrungskombinationen / bore combinations BKXS 2526						
d1 / d2	6	8	10	12	14	16
6	X	X	X	X	X	X
8		X	X	X	X	X
10			X	X	X	X
12				X	X	X
14					X	X
16						X
Bestellbeispiel / Example BKXS 2526 12/14						

BKXS 2531

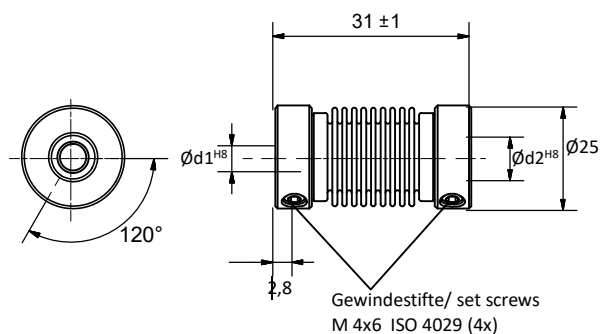

Bohrungskombinationen / bore combinations BKXS 2531						
d1 / d2	6	8	10	12	14	16
6	X	X	X	X	X	X
8		X	X	X	X	X
10			X	X	X	X
12				X	X	X
14					X	X
16						X
Bestellbeispiel / Example BKXS 2531 12/14						