


# Werknorm-Klemmringe – WNS

## Normblatt WNS 5-200 Ausführung A und B

Standardwerkstoffe: bis WNS-50: **11SMnPb30+C**  
 ab WNS-55: **11SMn30, o.ä.**  
 ab WNS-90: **C35, o.ä.**

Alle Abmessungen auch aus 1.4305

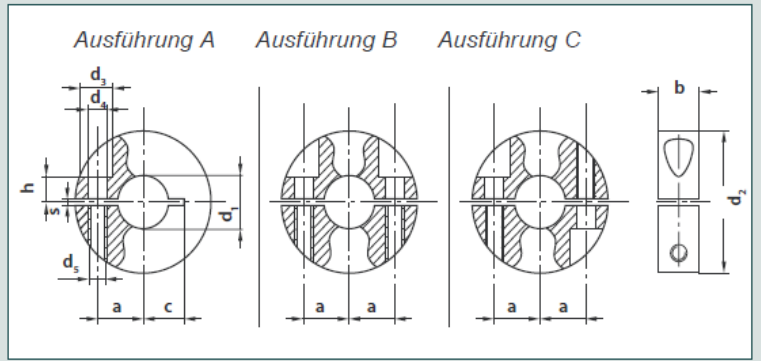

Bezeichnung	d1 H8	d2 h13	b j14	d3	d4	d5	a	c	s	h	Spannschrauben DIN912	ca. Gewicht pro 100 St.
WNS-5	5	25	10	8	4,2	M4	7,5	7	1,6	6	M4x16	3,68
WNS-6	6	25	10	8	4,2	M4	7,5	7	1,6	6	M4x16	3,61
WNS-8	8	25	10	8	4,2	M4	7,5	7	1,6	6	M4x16	3,44
WNS-10	10	32	10	8	4,2	M4	10,5	10	2	7	M4x16	5,66
WNS-12	12	32	10	8	4,2	M4	10,5	10	2	7	M4x16	5,4
WNS-14	14	40	12	10	5,5	M5	13,5	12	2	7	M5x20	10,33
WNS-15	15	40	12	10	5,5	M5	13,5	12	2	7	M5x20	10,11
WNS-16	16	40	12	10	5,5	M5	13,5	12	2	7	M5x20	9,88
WNS-17	17	40	12	10	5,5	M5	13,5	12	2	7	M5x20	9,64
WNS-18	18	45	12	10	5,5	M5	16		2	7	M5x20	11,5
WNS-20	20	45	12	10	5,5	M5	16		2	7	M5x20	11
WNS-22	22	45	12	10	5,5	M5	16		2	7	M5x20	10,5
WNS-25	25	50	12	10	5,5	M5	19		2	7	M5x20	12,8
WNS-30	30	56	12	10	5,5	M5	22		2	7	M5x20	15,2
WNS-35	35	63	12	10	5,5	M5	25		2	7	M5x20	18,5
WNS-40	40	70	14	11	6,6	M6	28		2	7	M6x20	26
WNS-45	45	80	14	11	6,6	M6	33		2	7	M6x20	34,8
WNS-50	50	80	14	11	6,6	M6	33		2	7	M6x20	31
WNS-55	55	90	16	14	9	M8	37		3	8	M8x20	45,2
WNS-60	60	100	16	14	9	M8	42		3	8	M8x20	57,9
WNS-70	70	110	20	17	11	M10	45		3	10	M10x25	82
WNS-80	80	125	20	17	11	M10	53		3	10	M10x25	105
WNS-90	90	140	25	17	11	M10	60		3	13	M10x30	170
WNS-100	100	140	25	17	11	M10	60		3	13	M10x30	140
WNS-110	110	160	25	17	11	M10	70		3	13	M10x30	198
WNS-120	120	160	25	17	11	M10	70		3	13	M10x30	171
WNS-130	130	180	28	19	13	M12	77		3	23	M12x50	264
WNS-140	140	200	28	19	13	M12	87		3	23	M12x50	340